

CERTIFICATE OF COMPLIANCE

Certificate Number 20150803-E135493
Report Reference E135493-A29-UL
Issue Date 2015-AUGUST-03

Issued to: VICOR CORP
25 FRONTAGE RD
ANDOVER MA 01810

This is to certify that COMPONENT - POWER SUPPLIES, INFORMATION
representative samples of



Bruce Mahrenholz, Director North American Certification Program
UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations/>



UL TEST REPORT AND PROCEDURE

Standard:	UL 60950-1, 2nd Edition, 2014-10-14 (Information Technology Equipment - Safety - Part 1: General Requirements) CAN/CSA C22.2 No. 60950-1-07, 2nd Edition, 2014-10 (Information Technology Equipment - Safety - Part 1: General Requirements)
Certification Type:	Component Recognition
CCN:	QQGQ2, QQGQ8 (Power Supplies for Information Technology Equipment Including Electrical Business Equipment)
Product:	DC-DC Converter
Model:	High Voltage VIA DCM Series
Rating:	See Miscellaneous Enclosure for model details. Rated Input Voltage: 420 V DC Max. Rated Output Voltage: 53 V DC Max. Rated Output Power: 600 W Max. See Miscellaneous Enclosure for model details.
Applicant Name and Address:	VICOR CORP 25 FRONTAGE RD ANDOVER MA 01810-5424 UNITED STATES

This is to certify that representative samples of the products covered by this Test Report have been investigated in accordance with the above referenced Standards. The products have been found to comply with the requirements covering the category and the products are judged to be eligible for Follow-Up Service under the indicated Test Procedure. The manufacturer is authorized to use the UL Mark on such products which comply with this Test Report and any other applicable requirements of UL LLC ('UL') in accordance with the Follow-Up Service Agreement. Only those products which properly bear the UL Mark are considered as being covered by UL's Follow-Up Service under the indicated Test Procedure.

The applicant is authorized to reproduce the referenced Test Report provided it is reproduced in its entirety.

UL authorizes the applicant to reproduce the latest pages of the referenced Test Report consisting of the first page of the Specific Technical Criteria through to the end of the Conditions of Acceptability.

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL.

Prepared by: Jeff Smith

Reviewed by: Mengis Tesfay

Supporting Documentation

The following documents located at the beginning of this Procedure supplement the requirements of this Test Report:

- A. Authorization - The Authorization page may include additional Factory Identification Code markings.
- B. Generic Inspection Instructions -
 - i. Part AC details important information which may be applicable to products covered by this Procedure. Products described in this Test Report must comply with any applicable items listed unless otherwise stated in the body of this Test Report.
 - ii. Part AE details any requirements which may be applicable to all products covered by this Procedure. Products described in this Test Report must comply with any applicable items listed unless otherwise stated in the body of each Test Report.
 - iii. Part AF details the requirements for the UL Certification Mark which is not controlled by the technical standard used to investigate these products. Products are permitted to bear only the Certification Mark(s) corresponding to the countries for which it is certified, as indicated in each Test Report.

Product Description

The High Voltage VIA DCM Modules are regulated isolating DC-DC Converters that provide a SELV output. The VIA DCM operates over a wide input range and provides a maximum output rating of 600 W.

Model Differences

See Miscellaneous Enclosure for model nomenclature.

Technical Considerations

- Equipment mobility : for building-in
- Connection to the mains : not directly connected to the mains
- Operating condition : continuous
- Access location : for building-in
- Over voltage category (OVC) : OVC II
- Mains supply tolerance (%) or absolute mains supply values : 160 - 420 Vdc
- Tested for IT power systems : No
- IT testing, phase-phase voltage (V) : N/A
- Class of equipment : Class I (earthed)
- Considered current rating of protective device as part of the building installation (A) : N/A
- Pollution degree (PD) : PD 2
- IP protection class : IP X0
- Altitude of operation (m) : Up to 5000 meters
- Altitude of test laboratory (m) : less than 2000 meters
- Mass of equipment (kg) : 0.119
- The product was submitted and evaluated for use at the maximum ambient temperature (Tma) w y t p l k ' i ' o l ' t h u r h j y z ' z w j p h p u ' v n A Z I ' k l -rating curve.

Engineering Conditions of Acceptability

For use only in or with complete equipment where the acceptability of the combination is determined by UL LLC. When installed in an end-product, consideration must be given to the following:

- The following secondary output circuits are SELV: All
- The investigated Pollution Degree is: 2
- The following end-product enclosures are required: Mechanical, Fire, Electrical
- The output is separated from the input by reinforced insulation.
- The output is considered SELV.

High Voltage VIA DCM Model Number Matrix: DCM3714cddewwxzyz

Example: DCM3714VD2H26F0T01

DCM = Constant

Product Function	
DCM	DC-DC Converter Module

3714 = Constant

Package Designator	
3714	3.7 x 1.4 inches

c = V

Package Type	
V	Chassis mount
B	Board mount

dd = D2

Maximum Input Voltage = 1 st character + 2 nd character (see table below, not to exceed 420V)							
1 st character		2 nd character					
A	100V	0	0 V	4	40 V	8	80 V
B	200V	1	10 V	5	50 V	9	90 V
C	300V	2	20 V	6	60 V		
D	400V	3	30 V	7	70 V		
Examples: D2 = 420V (400V+20V), C0 = 300V (300V+0V), B9 = 290V (200V+90V), B7 = 270V (200V+70V)							

e = H

Range Ratio (Vin high / Vin low, defines low line)							
A	1.10	G	1.95	N	3.45	U	6.12
B	1.21	H	2.14	P	3.80	V	6.73
C	1.33	J	2.36	Q	4.18	W	7.40
D	1.46	K	2.59	R	4.60	X	8.14
E	1.61	L	2.85	S	5.05	Y	8.95
F	1.77	M	3.14	T	5.60	Z	9.85

ww = 26

Maximum Output Voltage (any 2 digits up to 60), non-inclusive list of examples	
06	6Vdc (5V nominal +10% trim)
13	13Vdc (12V nominal +10% trim)
17	17Vdc (15V nominal +10% trim)
26	26Vdc (24V nominal +10% trim)
31	31Vdc (28V nominal +10% trim)
53	53Vdc (48V nominal +10% trim)

xx = F0

Maximum Output Power = 1 st character + 2 nd character (see table below, not to exceed 600W)					
1 st character		2 nd character			
A	100 W	0	0 W	5	50 W
B	200 W	1	10 W	6	60 W
C	300 W	2	20 W	7	70 W
D	400 W	3	30 W	8	80 W
E	500 W	4	40 W	9	90 W
F	600 W				


Examples: F0 = 600W (600W+0W), E0 = 500W (500W+0W),
D7 = 470W (400W+70W), C5 = 350W (300W+50W)

y = T

Product Grade	
C	-20 to 100°C
T	-40 to 100°C
M	-55 to 100°C

zz = 01

Options (non-safety related)	
01	Any alphanumeric

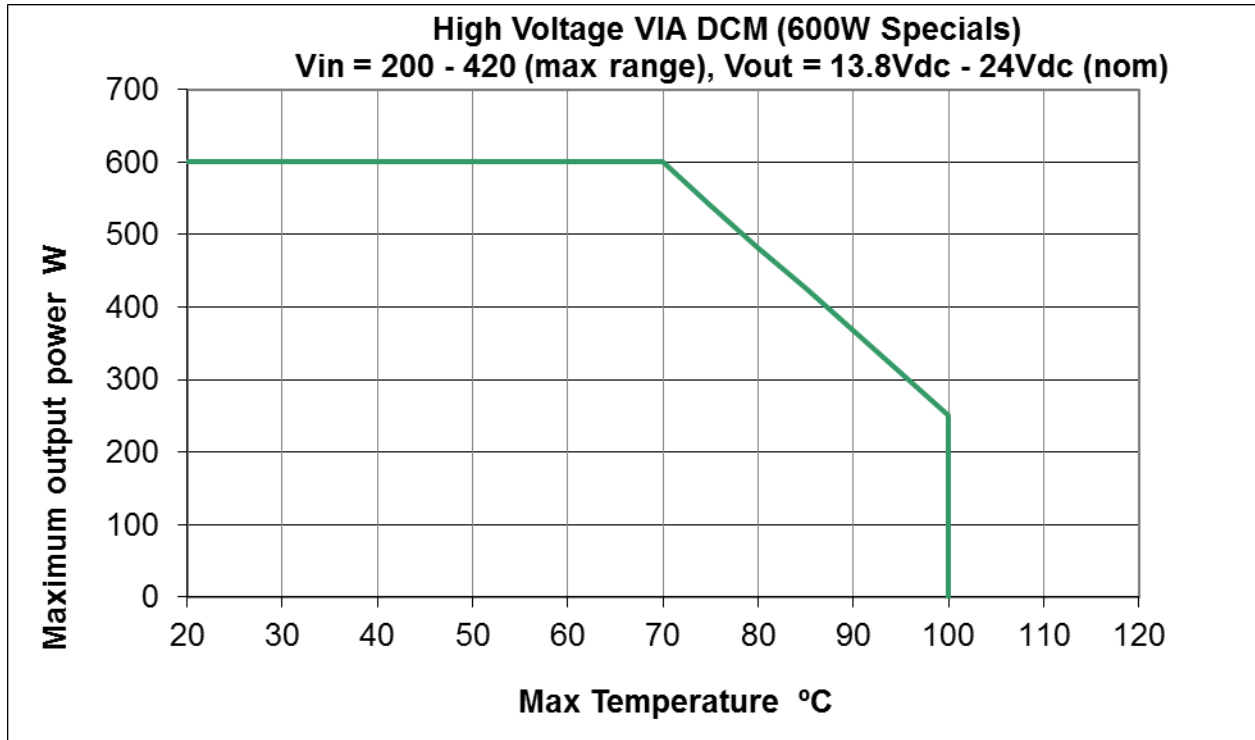

Pout vs. Vin de-rating curve for 600W specials model number **DCM3714xD2HwwF0yzz**

